


MULTI CROSS RILLO

Data Required for Coupling Size Selection

From (stamp): 	Contact person: _____ Department: _____ Telephone: _____ Fax: _____
-----------------------	--

Dipl. - Ing. Herwarth Reich GmbH
Vierhausstrasse 53
44807 Bochum



Drive side:

Prime mover: Diesel- / Hydraulic- / E-Motor
 Others: _____
 Nominal power: _____ kW at speed: [min⁻¹] _____
 Speed range: from _____ to _____ [min⁻¹]
 max. starting/shock torque: _____ [Nm]

Enquiries Orders

General system details:


Place of installation/environmental conditions: _____
 Load: uniform medium heavy
 Ambient temperature at the coupling: _____ [°C]
 Daily period of operation: _____ Hours/day
 Starting frequency: _____ per day
 Shaft displacement:
 ΔK_a : _____ [mm] / ΔK_r : _____ [mm] / ΔK_w : _____ [°]

Output side:

Driven machine: _____
 Nominal power: _____ [kW]
 max. load torque: _____ [Nm]
 in case of uneven torque load:
 from _____ to _____ [Nm]

Balancing: yes no

Balancing speed: _____ [min⁻¹] / grade: G _____
 Balancing with keyway: yes no
 Annotations: _____

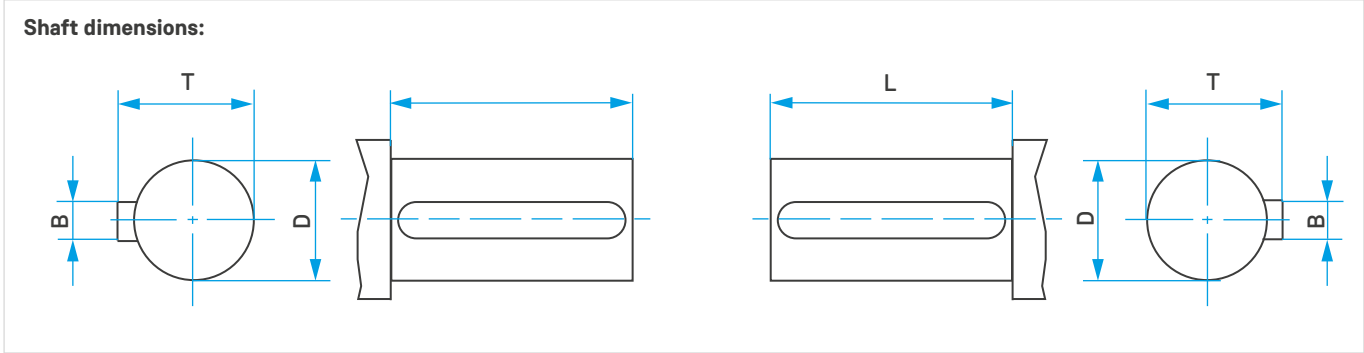

Further coupling design specifications (e.g. with brake drum/brake disc/material):

Further details of the complete system/principle sketch of installation situation:
